

# OPERATING INSTRUCTIONS SUMMARY FOR A LPG SYSTEM

1. Close tank valve immediately in any emergency.
2. Be sure all appliance valves are closed before opening tank valve.
3. Always apply lit match or other flame to burner before opening burner valve.
4. Close tank valve whenever appliance is not in use.
5. Test system for leakage at least twice a month and after any emergency in accordance with the following procedure:

WITH APPLIANCE VALVES CLOSED AND WITH TANK VALVE OPEN, NOTE PRESSURE ON GAUGE. CLOSE CYLINDER VALVE. IF THE PRESSURE DROPS, AS INDICATED ON THE GAUGE, THIS TELLS YOU THAT THERE IS A LEAK IN THE SYSTEM. LOCATE LEAKAGE BY APPLICATION OF LIQUID DETERGENT OR SOAP AND WATER SOLUTION TO ALL CONNECTIONS. AFTER LEAK HAS BEEN REPAIRED, RECHECK SYSTEM BY REPEATING THIS ABOVE TEST. IF LEAK CANNOT BE REPAIRED, CLOSE TANK VALVE IMMEDIATELY AND DO NOT USE THE SYSTEM. REMEMBER LPG IS HEAVIER THAN AIR AND IF ALLOWED TO REACH BILGES, MACHINERY SPACE OR OTHER ENCLOSED SPACES, IT CAN BE EXTREMELY DANGEROUS.


6. IT IS ALWAYS A GOOD IDEA TO HAVE AN APPROVED ABC TYPE FIRE EXTINGUISHER IN THE GALLERY AREA.

## LPG STOVE WITH IGNITER . . . MODELS: 3172, 3372

### TO LIGHT TOP BURNERS WITH SAFETY SYSTEM

1. Push in knobs and turn to "IGN" (Ignite) position.
2. Hold knob in and press the "Burner Ignite" button.
3. Hold knob in for 5 to 10 seconds until the Thermal Couple is hot. This will activate the safety magnet.
4. Release knob and set to desired setting. If the flame does not stay on, the Thermal Couple is not hot enough. (Repeat Steps 1-4).

SPARK FROM THE ELECTRODE HAS TO CUT ACROSS THE GAS TO IGNITE READILY. IF THE SPARK IS JUMPING BELOW THE BURNER PORTS ADJUST THE POINT OF THE ELECTRODE SO THAT THE SPARKS WILL JUMP ABOVE THE PORTS.

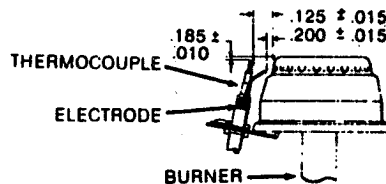

### TO LIGHT OVEN WITH SAFETY SYSTEM

1. Turn the thermostat to "light" position.
2. Push-in the safety button located next to the thermostat knob.
3. Light the burner ignition unit with a lighter or a match.
4. Hold the safety button pushed-in for approximately 10 to 15 seconds and slowly release the button. The flame should remain. If not repeat the procedure.

